

# 1280 Enterprise™ Series

Programmable Color Touchscreen Weight Indicator/Controller



## Specifications

### Power:

AC voltages: 100 to 240 VAC; 50 /60 Hz  
DC voltages: 11 to 30 VDC

### Power Consumption:

60W

### Excitation Voltage:

10 VDC (+/- 5 VDC)  
16 × 350 ohm or 32 × 700 ohm load cells per A/D card

### Analog Signal Input Range:

-60 mV to 60 mV

### Analog Signal Sensitivity:

0.3 µV/graduation minimum at 7.5 Hz to 120 Hz  
1.0 µV/graduation recommended

### A/D Sample Rate:

7.5 to 960 Hz, software selectable

### Resolution:

Internal: 8,000,000 counts  
Display: 1,000,000

### System Linearity

± 0.01% full scale

### Digital I/O:

Eight I/O channels on CPU board  
Optional 24-channel I/O expansion boards

### Communication Ports:

Port 1 & 2: Full duplex RS-232 with CTS/RTS, RS-422/485  
Baud rate: 1200 to 115200  
Port 3: USB 2.0 Device (Micro)  
USB host: (2) Type A connectors max 500 mA  
Ethernet: Wired 10/100 Auto-MDX  
Ethernet: Wireless 802.11 b/g/n 2.4GHz

### Onboard:

Selectable filters: Three stage, adaptive or damping  
Embedded Linux® OS  
8 GB eMMC (system use)  
1 GB DDR3 RAM  
460 MB onboard database (SQLite) storage  
Up to 32 GB micro SD card (sold separately)

### Display:

Seven-inch, 800 × 480 pixel, 500 or 1,000 NIT  
Twelve-inch, 1280 × 800 pixel, 1,500 NIT

### Keys/Buttons:

22-key membrane panel, tactile buttons, on-screen keyboard for text and numeric entry, USB port for flash drive, keyboard and printer

### Temperature Range:

Certified: 14 °F to 104 °F (-10 °C to 40 °C)  
Operating: -4 °F to 131 °F (-20 °C to 55 °C)

### Rating/Material:

Universal: IP69K  
Wall Mount: IP66  
Panel Mount: IP69K, NEMA Type 4X and 12  
Stainless steel 304 enclosure

### Weight:

Universal enclosure: 11 lb (4.9 kg)  
Panel mount enclosure: 8 lb (3.6 kg)  
Wall mount enclosure: 23 lb (10.4 kg)  
Panel mount 7 in touch-only: 7 lb (3.1 kg)  
Panel mount 12 in touch-only: 10 lb (4.5 kg)

### Warranty:

Two-year limited

### EMC Immunity:

10 V/m

### Approvals:

NTEP CC 15-001/Class III/IIII 10,000d  
Measurement Canada AM-5980C,  
Class III/III HD 10,000d  
OIML R76/2006-A-NL1-19.23  
Class III/IIII 10,000d  
EU Test Certificate TC8596  
UL/cUL Listed (Universal, Wall Mount)  
UL/cUL Recognized (Panel Mount)  
CE Marked

## Approvals



## Standard Features

- Customizable color touchscreen with graphical user interface
- User-defined softkeys, icons and graphics
- Tactile keypad for scale operations, numeric entry and navigation
- On-screen keyboard available during entry mode (or external keyboard)
- Built-in web server for remote access, systems integration and data monitoring
- Multi-language operation and text entry
- Supports eight scales within five different kinds:
  - Analog load cell, multi-range/interval weighing
  - Total scale summing
  - Serial input scales
  - iQUBE<sup>2</sup> scales
  - Program scales
- Six smart card slots for additional scale channels, serial ports, digital inputs and outputs, analog outputs and protocol interfaces
- iRite™ Programming Software
  - Five built-in applications: Truck in/out, recipe storage, filling/dosing, counting, checkweighing
  - Customizable user programs with event-based functions
  - 150 built-in functions for common processes & data tables
  - Customize and transfer data via email, FTP server and networked printers
  - Display data with line charts or bar graphs
- Dual-port assignments for weight tickets, credit cards, smart pass, HID readers, etc.
- iRite reporting or iQUBE2 alerts
- Email, USB, Ethernet TCP/IP, Wi-Fi Direct®, two serial ports RS-232 or RS-485
- Alibi memory captures serial port transmissions
- Four configurable data-stream formats for PC, printers and remote displays
- 100 setpoints, 18 configurable setpoint types
- Eight digital I/O for control and pulse count
- Three different enclosure types: universal with tilt stand, panel mount and wall mount

INDICATORS /  
CONTROLLERS

# 1280 Enterprise™ Series

Programmable Color Touchscreen Weight Indicator/Controller



7-inch model with keypad




7-inch touch-only model




12-inch touch-only model

INDICATORS / CONTROLLERS


## Numeric Keypad Models:

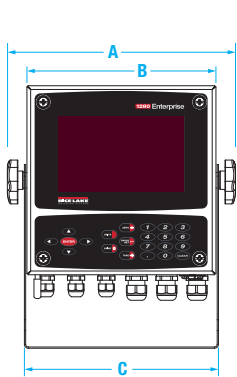

1280-2

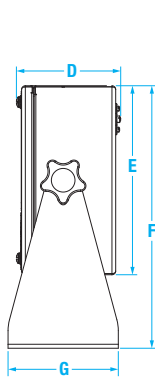

1280-3

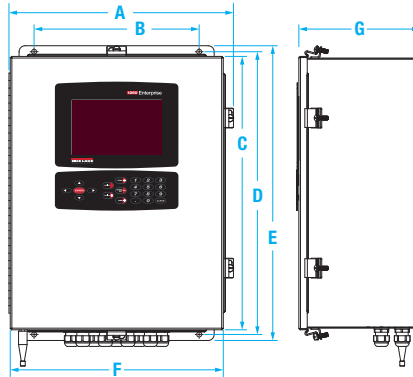


1280-4

Universal (1280-2) Dimensions			
A	10.86 in (276 mm)	E	9.00 in (229 mm)
B	9.00 in (229 mm)	F	12.50 in (318 mm)
C	9.24 in (235 mm)	G	5.25 in (133 mm)
D	4.97 in (126 mm)		


Wall Mount (1280-3) Dimensions			
A	14.92 in (379 mm)	E	19.64 in (499 mm)
B	11.00 in (279 mm)	F	14.20 in (361 mm)
C	18.22 in (463 mm)	G	8.08 in (205 mm)
D	18.84 in (479 mm)		

Panel Mount (1280-4) Dimensions			
A	9.00 in (229 mm)	D	5.34 in (136 mm)
B	9.00 in (229 mm)	E	0.32 in (8 mm)
C	0.58 in (15 mm)		

## Touch-only Models:

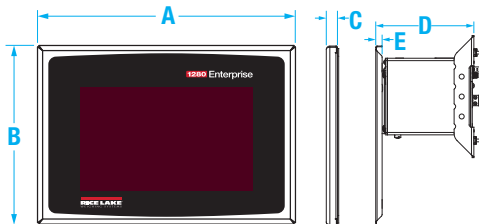

1280-5

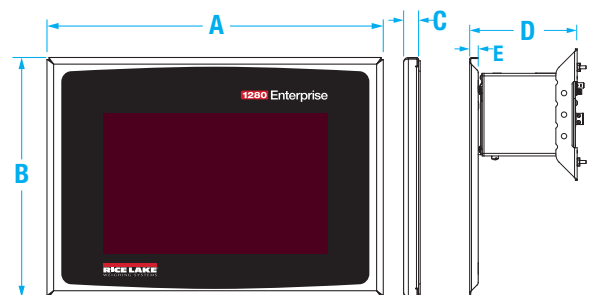

1280-6

7-inch Touch-only (1280-5) Dimensions			
A	9.00 in (229 mm)	D	5.34 in (136 mm)
B	6.22 in (158 mm)	E	0.32 in (8 mm)
C	0.58 in (15 mm)		

12-inch Touch-only (1280-6) Dimensions			
A	14.00 in (356 mm)	D	5.34 in (136 mm)
B	10.00 in (254 mm)	E	0.32 in (8 mm)
C	0.58 in (15 mm)		

# 1280 Enterprise™ Series

Programmable Color Touchscreen Weight Indicator/Controller

## Generate a 1280 Enterprise Series Model Reference Code

This reference number can be used at time of ordering.

### ENCLOSURE TYPE

- 1 Universal (1280-2)
- 2 Panel (1280-4)
- 3 Wall (1280-3)
- 4 Touch-only Panel 7 in (1280-5)
- 5 Touch-only Panel 12 in (1280-6)

### POWER TYPE

- 1 AC
- 2 DC

### CORD TYPE

- 1 US Plug Universal
- 2 Brazil Plug Universal
- 3 Euro Plug Universal
- 4 US Plug Wall
- 5 Euro Plug Wall
- 6 Brazil Plug Wall
- 7 UK Plug Universal
- 8 AU/NZ Plug Universal
- 9 UK Plug Wall
- A AU/NZ Plug Wall

### DISPLAY TYPE

- 1 500NIT 7 in Universal
- 2 1000NIT 7 in Universal
- 3 500NIT 7 in Panel/Wall
- 4 1000NIT 7 in Panel/Wall
- 5 1500NIT 12 in Panel

### OPTION CARDS ALL SLOTS MUST BE FILLED

A Blank <small>If no option, controller will need 6 blanks</small>	I Analog Input
B Single A/D Scale	J EtherNet/IP
C Dual A/D Scale	K DeviceNet
D 24 Channel Digital I/O	L ProfiNet
E Dual Serial Channel	M Modbus TCP
F 4-dry Contact Relay	N Profibus DP
G Single Analog Out	O EtherCat
H Dual Analog Out	P PowerLink

INDICATORS / CONTROLLERS

### Part Number

Part #	Reference #	Description	Power	Display	Option Installed	Price
<b>Universal Enclosure with 500 NIT Display (1280-2)</b>						
171427 †	1111BAAAAA	1280 Universal	115 VAC	500 NIT	Single Scale Card	Consult
171441 ††	1131BAAAAA	1280 Universal	100-240 VAC	500 NIT	Single Scale Card	Consult
171662 †	1111CAAAAAA	1280 Universal	115 VAC	500 NIT	Dual Scale Card	Consult
172188 ††	1131CAAAAAA	1280 Universal	100-240 VAC	500 NIT	Dual Scale Card	Consult
<b>Panel Mount Enclosure with 500 NIT Display (1280-4)</b>						
171663	21-3BAAAAA	1280 Panel Mount	100-240 VAC	500 NIT	Single Scale Card	Consult
172186	21-3CAAAAAA	1280 Panel Mount	100-240 VAC	500 NIT	Dual Scale Card	Consult
<b>Wall Mount Enclosure with 500 NIT Display (1280-3)</b>						
173673 †	3143BAAAAA	1280 Wall Mount	115 VAC	500 NIT	Single Scale Card	Consult
174143 ††	3153BAAAAA	1280 Wall Mount	100-240 VAC	500 NIT	Single Scale Card	Consult
174144 †	3143CAAAAAA	1280 Wall Mount	115 VAC	500 NIT	Dual Scale Card	Consult
174145 ††	3153CAAAAAA	1280 Wall Mount	100-240 VAC	500 NIT	Dual Scale Card	Consult
<b>Wall Mount Enclosure with 1000 NIT Display (1280-3)</b>						
172184 †	3144BAAAAA	1280 Wall Mount	115 VAC	1,000 NIT	Single Scale Card	Consult
172185 ††	3154BAAAAA	1280 Wall Mount	100-240 VAC	1,000 NIT	Single Scale Card	Consult
206563 †	3144CAAAAAA	1280 Wall Mount	115 VAC	1,000 NIT	Dual Scale Card	Consult
172187 ††	3154CAAAAAA	1280 Wall Mount	100-240 VAC	1,000 NIT	Dual Scale Card	Consult
<b>Touch-only 7 inch with 500 NIT Display (1280-5)</b>						
186618	41-3BAAAAA	1280 Touch-only 7 in	100-240 VAC	500 NIT	Single Scale Card	Consult
<b>Touch-only 12 inch with 1500 NIT Display (1280-6)</b>						
186465	51-5BAAAAA	1280 Touch-only 12 in	100-240 VAC	1,500 NIT	Single Scale Card	Consult



† US plug (NA) - Type B



†† Euro Plug - Type E



(Brazil) - Type N



††† BS1363 (UK) - Type G



†††† AS 3112 (Australian) - Type I

# 1280 Enterprise™ Series

Programmable Color Touchscreen Weight Indicator/Controller

INDICATORS / CONTROLLERS

## Single A/D Scale



**Excitation Voltage:**  
10 VDC bi-polar, 4 or 6 wire sensing  
16 × 350 ohms per channel

**Analog Input Signal:**  
-10 to +40 mV

Part #	Description	Price
164085	Single scale A/D	Consult
166957	A/D sealing kit	Consult

## Dual A/D Scale



**Excitation Voltage:**  
10 VDC bi-polar, 4 or 6 wire sensing  
8 × 350 ohms per channel

**Analog Input Signal:**  
-10 to +40 mV

Part #	Description	Price
164683	Dual scale A/D	Consult
166957	A/D sealing kit	Consult

## Digital I/O



24 channels, configurable as inputs or outputs  
Inputs: 5 VDC max, active low; Outputs: 20 mA max per channel, active low; 5 VDC source available: 500 mA max

Part #	Description	Price
164684*	Digital I/O	Consult
170008	DIO adapter, includes 60 pin flat ribbon cable, 24 in	Consult
170009	DIO adapter, includes 60 pin round cable, 60 in	Consult
170736	DIO adapter, includes 60 pin cable and cord grip, 60 in	Consult

\* 24 I/O ribbon cable required.

## Dual Serial Channel



Two-channel, full duplex RS-232 with CTS/RTS, RS-485 or RS-422, 1200-115200 baud

Part #	Description	Price
164685	Dual serial channel	Consult

## Single Analog Out



16 bit, voltage output 0-10 VDC, current output 0-20mA, 4-20mA

Part #	Description	Price
165366	Single analog out	Consult


## Dual Analog Out



16 bit, voltage output 0-10 VDC, current output 0-20mA, 4-20mA

Part #	Description	Price
164686	Dual analog out	Consult

## Relay Card



Relay four-dry contact, max current 3A @ 30 VDC, 3A @250VAC

Part #	Description	Price
164689	Relay card	Consult

## Analog Input



**Analog Input Signal:**  
±10VDC, ±100mV, 0-20 mA

Part #	Description	Price
164687	Dual analog input	Consult

## Data Exchange with PLC/DCS Systems

### EtherNet/IP



Part #	Description	Price
165792	EtherNet/IP, single port	Consult
208129	EtherNet/IP, dual port	Consult

### DeviceNet



Part #	Description	Price
165793	DeviceNet	Consult

### Profinet



Part #	Description	Price
165794	Profinet	Consult

### Modbus TCP



Part #	Description	Price
165796	Modbus TCP	Consult

### Profibus DP



Part #	Description	Price
165795	Profibus DP	Consult

### EtherCAT



Part #	Description	Price
179533	EtherCAT	Consult

### PowerLink



Part #	Description	Price
182319	PowerLink	Consult

# 1280 Enterprise™ Series

Programmable Color Touchscreen Weight Indicator/Controller

## Options/Accessories

To have your option factory installed, please specify when placing your order.

Part #	Description	Price
<b>Manuals and Software</b>		
167659	Manual, Technical	Consult
72809	Interchange database software	Consult
164939	8 GB Micro SD card with SD and USB adapter	Consult
195607	USB flash drive, 1 GB	Consult
<b>Extended Display Cable Length for Touch Only Models</b>		
182600	Display cable for 7 in (500 NIT) touch-only, 5 ft length	Consult
182601	Display cable for 7 in (500 NIT) touch-only, 10 ft length	Consult
187489	Display cable for 7 in (1,000 NIT) touch-only, 10 ft length	Consult
180027	Display cable for 12 in touch-only, 5 ft length	Consult
180028	Display cable for 12 in touch-only, 10 ft length	Consult
<b>Extended Touch Cable Length for Touch Only Models</b>		
180744	Touch cable for touch-only, 5 ft length	Consult
180745	Touch cable for touch-only, 10 ft length	Consult

## Primary Component Parts

Part #	Description	Price
<b>Displays</b>		
163400	7 in 500 NIT display	Consult
163399	7 in 1,000 NIT display	Consult
182992	12 in 1,500 NIT display	Consult
<b>Boards</b>		
179992	CPU board assembly includes face plate and fan plate	Consult
199157	Controller box, CPU, power supply, backplane	Consult
<b>Power Supplies</b>		
202512	AC power supply board	Consult
202514	DC power supply board	Consult
<b>Overlays</b>		
164121	Keypad, for panel & wall mount	Consult
164120	Touchscreen, for panel & wall mount	Consult
161731	Keypad, for universal	Consult
161730	Touchscreen, for universal	Consult
178498	Touchscreen, for 7 in touch-only panel mount	Consult
176126	Touchscreen, for 12 in touch-only panel mount	Consult
178161	Clear protective overlay display (pack of 5)	Consult
178163	Clear protective overlay keypad (pack of 5)	Consult

## Cables and Receptacles

To have your option factory installed, please specify when placing your order.

Part #	Connector Type	Length	Price
<b>USB Cables (Connector is a male plug)</b>			
79074	A UNSEALED B UNSEALED	2 m	Consult
124700	A SEALED B SEALED	3 m	Consult
126477	A SEALED A UNSEALED	3 m	Consult
124701	A SEALED B UNSEALED	3 m	Consult
124702	B SEALED A UNSEALED	3 m	Consult
152434	A UNSEALED Micro A UNSEALED	2 m	Consult
<b>USB Receptacles (Receptacle is a socket)</b>			
176790 Panel Mount	A SEALED A UNSEALED	0.75 m	Consult
126476 Wall Mount	A SEALED A UNSEALED	0.5 m	Consult
172735 Universal	A SEALED A UNSEALED	0.25 m	Consult
<b>Ethernet Cables</b>			
72697	RJ-45 UNSEALED RJ-45 UNSEALED	2 m	Consult
124706	RJ-45 SEALED RJ-45 SEALED	3 m	Consult
124707	RJ-45 SEALED RJ-45 UNSEALED	2 m	Consult
<b>Ethernet Receptacles (Receptacle is a socket)</b>			
176789	RJ-45 SEALED	0.75 m	Consult
172734	RJ-45 SEALED	0.5 m	Consult
126353	RJ-45 SEALED	0.25 m	Consult
<b>Cable and Receptacle Accessories</b>			
124694	Cover for sealed receptacles		Consult
124689	Cover for flash driver mounts on sealed receptacle		Consult

INDICATORS / CONTROLLERS

### Unsealed Connectors

