



Picture is a representation of actual product.

**Approvals**





**Order Information**

Load Rating	Part #	Est. Weight	Price
<b>NTEP Certified</b>			
5 kg	<b>188691</b>	2 lb	Consult
10 kg	<b>188692</b>	2 lb	Consult
20 kg	<b>188693</b>	2 lb	Consult
30 kg	<b>188694</b>	2 lb	Consult
50 kg	<b>188702</b>	2 lb	Consult
75 kg	<b>188695</b>	2 lb	Consult
100 kg	<b>188696</b>	2 lb	Consult
200 kg	<b>188697</b>	2 lb	Consult
250 kg	<b>188698</b>	2 lb	Consult
300 kg	<b>188699</b>	2 lb	Consult
500 kg	<b>188700</b>	2 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G	H	J	K	M	N
kg/mm												
5 to 500	120.0	41.5	23.5	30.0	24.5	42.0	10.0	82.0	18.0	20.0	20.0	8.2

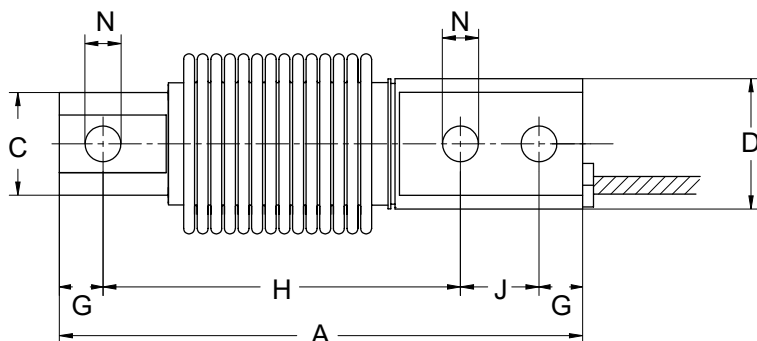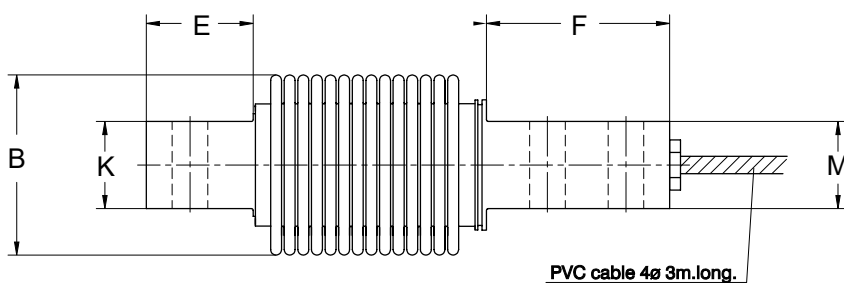

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS  
**RLHBB**  
VPG® TEDEA®  
**355**.....page 309

**Specifications**

- Full Scale Output:**  
2.0 mV/V ±10% current matched
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
400 (± 20) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Hermetically sealed, IP68/IP69K
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.017% full scale
- Insulation Resistance:**  
>5,000 megohm
- Deflection:**  
0.2 to 0.4 mm
- Cable Length:**  
3 m
- Cable Material:**  
PVC
- Cable Color Code:**  
Blue +Excitation  
Black -Excitation  
White +Signal  
Red -Signal  
Green +Sense  
Yellow -Sense
- Warranty:**  
Two-year limited
- Approvals:**  
cFMus  
NTEP 18-107  
OIML R60/2017-A-NL1-19.27

**RICE LAKE  
LOAD CELLS**