

SINGLE POINT  
**1260S**

Aluminum, Environmentally Sealed, NTEP Certified 1:10,000 Class III Single Cell, IP66



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
75 kg	76395	5 lb	Consult
100 kg	76396	5 lb	Consult
150 kg	76397	5 lb	Consult
200 kg	76398	5 lb	Consult
250 kg	76399	5 lb	Consult
500 kg	76401	5 lb	Consult
635 kg	76402	5 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
kg/mm													
75 to 635	52.0	16.0	62.3	52.0	16.0	52.3	63.0	50.0	35.0	107.0	35.0	5.5	188.0

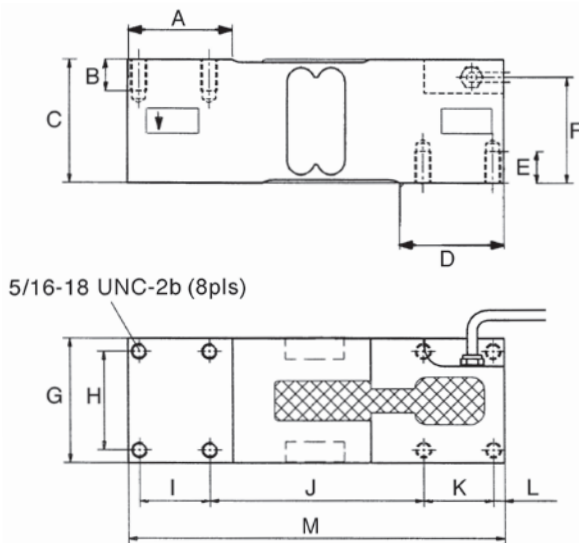

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS  
**RL1260** ..... page 166
- RICE LAKE WEIGHING SYSTEMS  
**RL26018A**..... page 168
- VPG® TEDEA-HUNTLEIGH  
**1260** ..... page 319

Specifications

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
415 (± 15) ohm
- Material/Finish:**  
Anodized aluminum
- Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP66
- Safe Overload:**  
150% of full scale at center loading point
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
2,000 megohm
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.220 in  
Polyurethane jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense
- Max Platform Size:**  
24 × 24 in
- Warranty:**  
One-year limited
- Approvals:**  
cFMus  
NTEP

TEDEA-HUNTLEIGH VPG