



Picture is a representation of actual product

Approvals






Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
50 kg	157478	5 lb	Consult
100 kg	157479	5 lb	Consult
150 kg	157480	5 lb	Consult
200 kg	157481	5 lb	Consult
250 kg	157482	5 lb	Consult
300 kg	157483	5 lb	Consult
500 kg	157484	5 lb	Consult
635 kg	157485	5 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
50 to 635 kg	174.0	122.0	60.0	62.5	43.0	19.0	30.0	7.0	M8-6

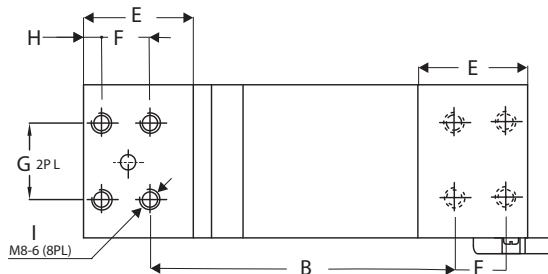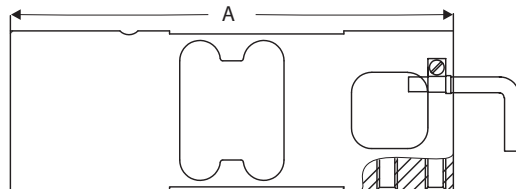

Interchangeable Products

TRANSCCELL®  
FAV

Specifications

**Full Scale Output:**  
2 mV/V

**Output Resistance:**  
350 (± 3) ohm

**Input Resistance:**  
415 (± 15) ohm

**Material/Finish:**  
Anodized aluminum

**Temperature:**  
Operating range:  
0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**  
Environmentally sealed, IP66

**Safe Overload:**  
150% of rated output

**Rated Excitation:**  
10 VAC (15 V maximum)

**Combined Error:**  
0.02% full scale

**Insulation Resistance:**  
2,000 megohm

**Cable Length:**  
5 ft

**Cable Diameter:**  
0.200 in  
PVC jacket

**Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal

**Max Platform Size:**  
24 × 24 in

**Warranty:**  
One-year limited

**Approvals:**  
OIML  
Ex (Available upon request)

VPG  
TEDEA-HUNTLEIGH