

Picture is a representation of actual product

**Approvals**




Available upon request

**Order Information**

Load Rating	Part #	Est. Weight	Price
7.5 kg	<b>112921</b>	1 lb	Consult
15 kg	<b>186687</b>	1 lb	Consult
37.5 kg	<b>112922</b>	1 lb	Consult
50 kg	<b>112923</b>	1 lb	Consult
75 kg	<b>112924</b>	1 lb	Consult
150 kg	<b>112925</b>	1 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
7.5	70.0	39.0	4.9	28.0	14.0	2.5	27.8	5.1	5.1
15.0	70.0	39.0	4.9	28.0	14.0	4.1	27.8	5.1	5.1
37.5	76.2	44.5	6.0	29.3	15.0	4.8	30.0	6.6	6.2
50.0	84.5	55.0	6.4	34.0	15.0	5.3	30.0	6.6	7.6
75.0	84.5	55.0	6.4	34.0	15.0	6.4	30.0	6.6	7.6
150.0	107.5	70.0	7.8	45.9	22.8	8.0	44.5	8.1	8.2

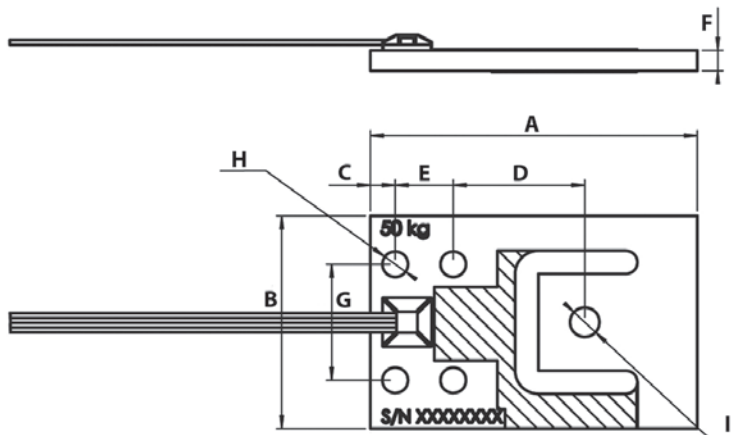

**Specifications**

**Full Scale Output:**

1.0 mV/V

**Output Resistance:**

1,000 (± 10) ohm

**Input Resistance:**

1,160 (± 15) ohm

**Material/Finish:**

Aluminum

**Temperature:**

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**

Environmentally sealed, IP65

**Safe Overload:**

150% full scale

**Rated Excitation:**

5 to 10 VDC

**Insulation Resistance:**

5,000 megohm

**Cable Length:**

1.5 m flat ribbon type, PVC

**Cable Color Code:**

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

**Warranty:**

One-year limited

**Approvals:**

NTEP

OIML (available upon request)

VPG  
TEDEA-HUNTLEIGH