



Picture is a representation of actual product

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
250 lb	17077	2 lb	Consult
500 lb	17078	3 lb	Consult
750 lb	17079	3 lb	Consult
1,000 lb	17080	3 lb	Consult
1,500 lb	17081	3 lb	Consult
2,000 lb	17082	3 lb	Consult
2,500 lb	17083	3 lb	Consult
3,000 lb	17084	3 lb	Consult
5,000 lb	17085	4 lb	Consult
10,000 lb	17086	5 lb	Consult
15,000 lb	17087	8 lb	Consult
20,000 lb	17088	16 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E
lb/in					
250	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 1,500	1/2-20 UNF	1.00	0.75	2.00	3.00
2,000 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.75
15,000	1-14 UNS	1.50	1.25	4.00	5.50
20,000	1 1/4-12 UNF	2.00	1.94	5.00	7.00

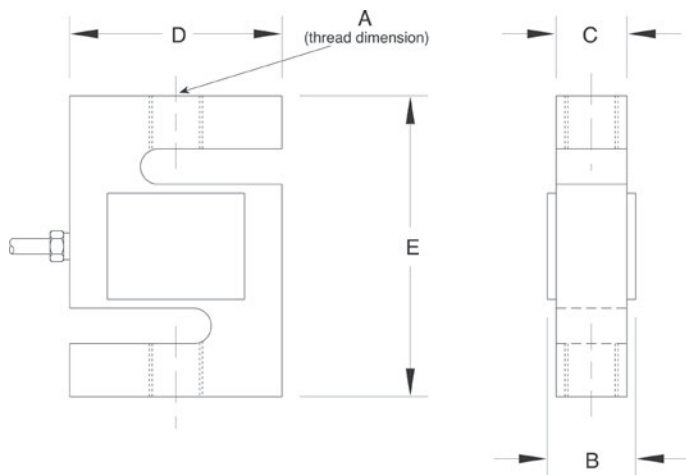

**Interchangeable Products**

VPG® CELTRON  
**STC SS**..... page 189

**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS  
**ITCM Isolated Tension Cell Mount**..... page 28

**Specifications**

- Full Scale Output:**  
3.0 mV/V
- Output Resistance:**  
349 to 355 ohm
- Input Resistance:**  
343 to 450 ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 V DC (15 V maximum)
- Nonlinearity:**  
0.03% full scale
- Hysteresis:**  
0.02% full scale
- Insulation Resistance:**  
5,000 megohm
- Cable Length:**  
20 ft
- Cable Diameter:**  
0.200 in  
Polyurethane jacket
- Cable Color Code:**  
Red +Excitation  
Black -Excitation  
Green +Signal  
White -Signal
- Warranty:**  
One-year limited
- Approvals:**  
cFMus