

Picture is a representation of actual product

Approvals







Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	36295	4 lb	Consult
1,500 lb	36296	4 lb	Consult
2,000 lb	36297	4 lb	Consult
2,500 lb	36298	4 lb	Consult
5,000 lb	36299	4 lb	Consult
10,000 lb	36300	7 lb	Consult
15,000 lb	36301	7 lb	Consult
20,000 lb	36302	7 lb	Consult
25,000 lb	36303	7 lb	Consult
50,000 lb	36304	27 lb	Consult
75,000 lb*	36305	27 lb	Consult

*75,000lb capacity has a square center

Dimensions

Rated Capacity	E	G	A1	A2	B	C	CONDUIT ADAPTER	F
lb/in								
1,000 to 5,000	0.50	1.25	1.25	1.25	7.50	6.25	1/4-18 NPT	1.12
10,000 to 25,000	0.81	1.99	1.44	1.94	8.75	7.50	1/4-18 NPT	1.62
50,000	1.31	3.00	2.44	2.94	13.50	11.50	1/2-14 NPT	3.75
75,000	1.31	—	2.44	2.94	13.50	11.50	1/2-14 NPT	3.75

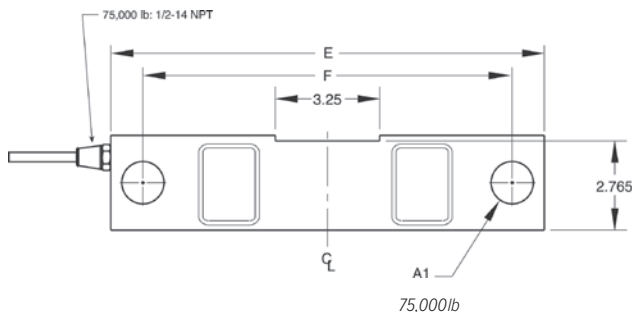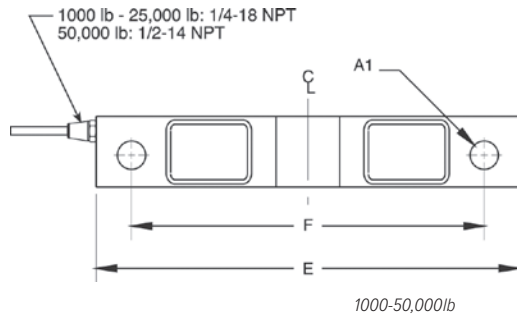

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL75016WHE..... page 135
- VPG® SENSORTRONICS
65016WH..... page 292

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
RL1600 Series...page 67 and page 69

Specifications

- Full Scale Output:**
3.0 mV/V nominal
- Output Resistance:**
699 to 707 ohm
- Input Resistance:**
686 to 714 ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Welded-seal, IP67
- Safe Overload:**
150% full scale
- Safe Sideload:**
100% full scale
- Rated Excitation:**
5 to 10 V DC (15 V maximum)
- Nonlinearity:**
0.03% full scale
- Hysteresis:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
25 ft
- Cable Diameter:**
1,000 to 25,000 lb: 0.200 in
50,000 to 75,000 lb: 0.305 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus