




Picture is a representation of actual product

Pictured with integral foot for 250lb-2,000lb

Approvals



Order Information


| Load Rating | Part # | Est. Weight | Price |
|--|--------|-------------|---------|
| NTEP Certified | | | |
| 250 lb* | 69380 | 3 lb | Consult |
| 500 lb* | 69381 | 3 lb | Consult |
| 1,000 lb* | 69382 | 3 lb | Consult |
| 2,000 lb* | 99314 | 3 lb | Consult |
| 2,500 lb | 69383 | 3 lb | Consult |
| 4,000 lb | 69384 | 3 lb | Consult |
| 5,000 lb SE | 69385 | 3 lb | Consult |
| 5,000 lb | 69386 | 8 lb | Consult |
| 10,000 lb | 69387 | 8 lb | Consult |
| 15,000 lb | 69388 | 8 lb | Consult |
| 20,000 lb | 69389 | 9 lb | Consult |
| Conduit Adapters (must be factory installed to maintain warranty) | | | |
| 1/4-18 NPT | 31534 | 1 lb | Consult |

SE=Small envelope

* Load cell has an integral foot

Dimensions

| Rated Capacity | C | H | H1 | L | L1 | L2 | L3 | L4 | T | W |
|-----------------|------|------|------|------|------|------|------|------|------------|------|
| lb/in | | | | | | | | | | |
| 250 to 5,000 SE | 0.53 | 1.23 | 0.67 | 5.12 | 0.62 | 1.00 | 3.00 | 2.25 | 1/2-20 UNF | 1.23 |
| 5,000 to 15,000 | 0.78 | 1.45 | 0.70 | 6.75 | 0.75 | 1.50 | 3.75 | 3.12 | 3/4-16 UNF | 1.50 |
| 20,000 | 1.06 | 1.95 | 0.98 | 8.75 | 1.00 | 2.00 | 4.75 | 4.00 | 1-12 UNF | 1.95 |

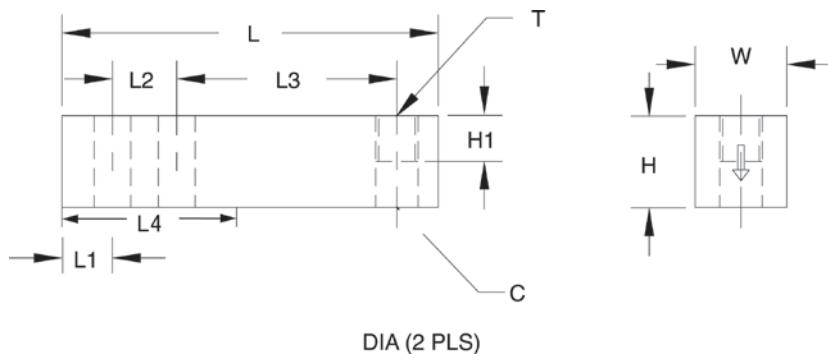

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL39123**page 111

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
RL50210TA..... page 31
 RICE LAKE WEIGHING SYSTEMS
RL1800 Series..... page 42

** Non-NTEP Certified

Specifications

Full Scale Output:
 3.0 mV/V

Output Resistance:
 350 (± 3.5) ohm

Input Resistance:
 350 (± 3.5) ohm

Material/Finish:
 Stainless steel

Temperature:
 Compensated range
 0 °F to 150 °F (-18 °C to 65 °C)
 Operating range
 0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
 Environmentally sealed, IP67

Safe Overload:
 150% full scale

Safe Sideload:
 100% full scale

Rated Excitation:
 5 to 10 VDC (15 V maximum)

Combined Error:
 0.02% full scale

Non-repeatability:
 0.01% full scale

Insulation Resistance:
 5,000 megohm

Cable Length:
 20 ft

Cable Color Code:
 Red +Excitation
 Black -Excitation
 Green +Signal
 White -Signal

Warranty:
 One-year limited

Approvals:
 cFMus
 NTEP