



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
100 lb	31317	2 lb	Consult
200 lb	31316	2 lb	Consult
300 lb	31315	2 lb	Consult
500 lb	31314	2 lb	Consult
750 lb	31313	2 lb	Consult
1,000 lb	31312	2 lb	Consult
1,500 lb	31311	2 lb	Consult
2,000 lb	31310	2 lb	Consult
2,500 lb	98875	3 lb	Consult
3,000 lb	31309	4 lb	Consult
5,000 lb	31318	4 lb	Consult
10,000 lb	31308	4 lb	Consult
Non-NTEP Certified			
50 lb	17076	2 lb	Consult
15,000 lb	165260	7 lb	Consult
20,000 lb	165261	13 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E
lb/in					
50 to 300	1/4-28 UNF	0.65	0.46	2.00	2.40
500 to 1,500	1/2-20 UNF	0.90	0.71	2.00	2.40
2,000 to 2,500	1/2-20 UNF	1.13	0.96	2.00	2.40
3,000	1/2-20 UNF	1.13	0.96	3.00	3.90
5,000	3/4-16 UNF	1.15	0.96	3.00	3.90
10,000	3/4-16 UNF	1.40	1.21	2.94	3.90
15,000	1-14 UNS	1.63	1.46	3.44	5.50
20,000	1 1/4-12 UNF	1.88	1.68	4.44	7.00

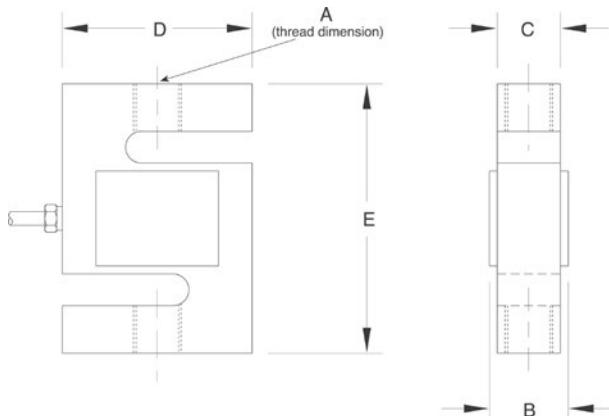

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL20000SS page 93
- RICE LAKE WEIGHING SYSTEMS
RL20000ST page 94

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
ITCM Isolated Tension Cell Mount page 28

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
350 (± 3.5) ohm
- Input Resistance:**
390 (± 15) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.025% full scale
- Non-repeatability:**
0.01% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
20 ft
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus
NTEP

VPG REVERE