

Picture is a representation of actual product.

Approvals




Order Information

| Load Rating | Part # | Est. Weight | Price |
|-------------|--------|-------------|---------|
| 7 kg | 36185 | 2 lb | Consult |
| 10 kg | 36186 | 2 lb | Consult |
| 15 kg | 36187 | 2 lb | Consult |
| 30 kg | 36188 | 2 lb | Consult |
| 60 kg | 36189 | 2 lb | Consult |
| 100 kg | 68551 | 2 lb | Consult |
| 150 kg | 69345 | 2 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | D | E | F | G |
|----------------|------|-------|------|-----|------|------------|------|
| kg/mm | | | | | | | |
| 7 to 15 | 30.2 | 139.7 | 19.1 | 6.4 | 88.9 | 1/4-20 UNC | 19.1 |
| 30 to 60 | 30.2 | 139.7 | 19.1 | 6.4 | 88.9 | 1/4-20 UNC | 23.9 |
| 100 to 150 | 30.2 | 139.7 | 22.3 | 7.8 | 79.2 | 3/8-16 UNC | 30.7 |

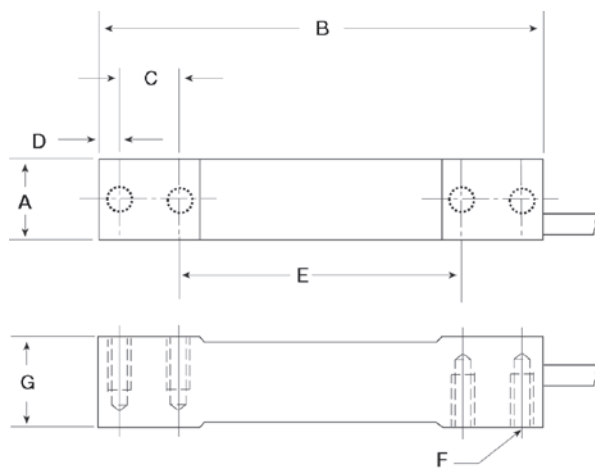

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
- RL1380.....page 164
- FLINTEC®
- PC3.....page 217

Specifications

Full Scale Output:
2.0 mV/V

Output Resistance:
359 (± 10) ohm

Input Resistance:
390 (± 15) ohm

Material/Finish:
Stainless steel

Temperature:
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally sealed, IP67

Safe Overload:
150% full scale

Rated Excitation:
5 to 10 VDC (15 V maximum)

Combined Error:
0.03% full scale

Insulation Resistance:
5,000 megohm

Cable Length:
10 ft

Cable Diameter:
0.190 in
Polyurethane jacket

Deflection:
<0.4 mm full scale

Cable Color Code:
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield

Warranty:
One-year limited

Approvals:
FM
NTEP
OIML

