


# Z6

Stainless Steel, Welded Seal, OIML C3, IP68

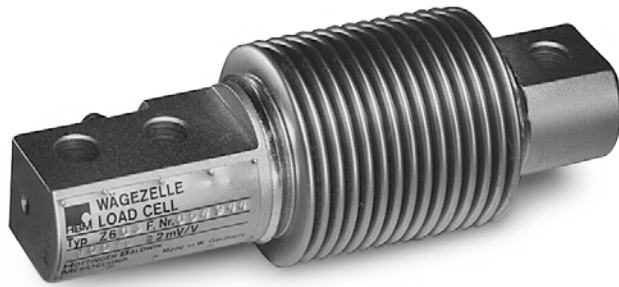

Picture is a representation of actual product.

### Approvals





### Order Information

Load Rating	Part #	Est. Weight	Price
<b>OIML C3</b>			
10 kg	36173	2 lb	Consult
20 kg	36174	2 lb	Consult
50 kg	36175	2 lb	Consult
100 kg	36176	2 lb	Consult
200 kg	36177	2 lb	Consult
<b>OIML D1</b>			
5 kg	36172	2 lb	Consult

### Dimensions

Rated Capacity	H	L	L1	L2	L3	L4	L5	L6	W	W2	D
kg/mm											
5 to 200	31.0	123.0	18.0	82.0	9.9	21.0	45.0	27.9	42.0	20.1	8.2

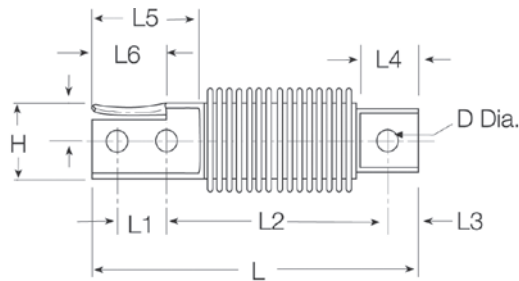

### Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS  
**RL9018SS** ..... page 107
- RICE LAKE WEIGHING SYSTEMS  
**RLHBB\*\***
- VPG® REVERE  
**SHB** ..... page 253
- VPG® TEDEA-HUNTLEIGH  
**355** ..... page 309
- METTLER TOLEDO®  
**MTB\*\*\***

\*\* Except for 500 kg

\*\* Color code is different

### Specifications

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
356 ohm
- Input Resistance:**  
350 to 400 ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Welded-seal, IP68
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 V DC (15 V maximum)
- Combined Error:**  
0.05% full scale
- Insulation Resistance:**  
5,000 megohm
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.190 in PVC jacket
- Cable Color Code:**  
Blue +Excitation  
Black -Excitation  
White +Signal  
Red -Signal  
Green +Sense  
Grey -Sense
- Warranty:**  
One-year limited
- Approvals:**  
FM  
OIML  
Ex (available upon request)