


EL147, 6 Wire

Standard Load Cell Cable



Approvals

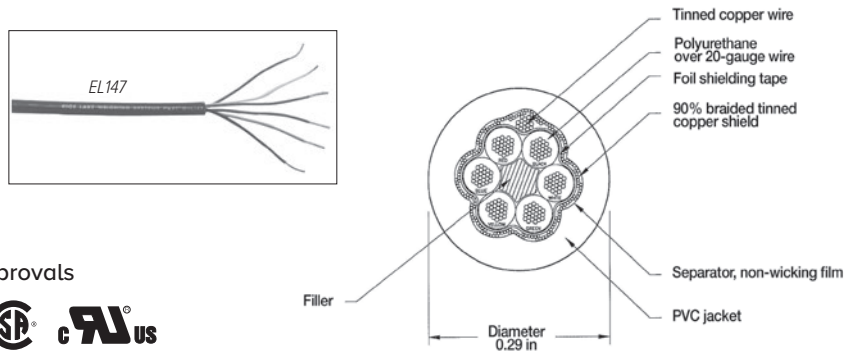

Standard Features

EL147 Standard Cable

- 20 AWG tinned copper wire stranded for flexibility
- Braided shielding is encased in red PVC
- All conductors are industry-standard color coded
- Diameter: 0.29 in
- The six-wire cable is best suited for longer runs where remote sense lines can be used
- Temperature rating:
-22 °F to 126 °F (-30 °C to 80 °C)

Part Number/Price


Part #	Continuous Roll	Description	Price
15515	100 ft	Six-conductor cable	Consult
15516	250 ft	Six-conductor cable	Consult
15517	500 ft	Six-conductor cable	Consult
15518	1,000 ft	Six-conductor cable	Consult
15495	Custom length	Six-conductor cable	Consult/ft

HARDWARE AND ACCESSORIES

EL147RP Plus, 6 Wire

Rodent Protection Load Cell Cable

Six-conductor polyurethane over 20 gauge stranded wire
95% tinned copper overbraid

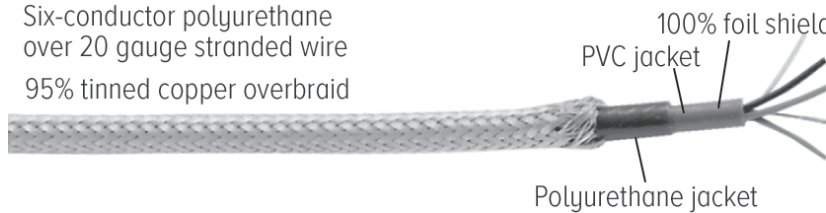

Standard Features

EL147RP Rodent Protection Cable

- Tinned copper overbraid provides superior rodent and abrasion deterrent
- Enhanced EMI/RFI protection
- Six-conductor industry-standard color code
- Ideal for truck and railroad-track scales
- Diameter: 0.33 in
- Temperature rating
-22 °F to 176 °F (-30 °C to 80 °C)
- Jacket coating enhanced with a chemical coating "NAW" that is distasteful to rodents

Part Number/Price

Part #	Continuous Roll	Description	Price
31475	Custom length	Six-conductor hostile environment cable	Consult/ft
131964	100 ft	Six-conductor hostile environment cable	Consult
131965	250 ft	Six-conductor hostile environment cable	Consult
131966	500 ft	Six-conductor hostile environment cable	Consult
131967	1,000 ft	Six-conductor hostile environment cable	Consult