



Standard Features

- System includes two platforms and four on/off ramps (anchor bolts not included)

Scale

- Sizes: 7 ft, 12 ft and 14 ft lengths
- Construction: Steel or aluminum
- Axle capacity - tandem platforms - 60,000 or 80,000 lb (30,000 or 40,000 lb each)
- Includes (4) 5/8-11 NC eye bolts for lifting scale during installation
- Contains two load cells per platform
- Treaded top plate with four lifting eyes
- JB4SS TuffSeal® signal trim junction box
- 10 ft EL146HE Interconnect cable with MS-type connectors to go between weigh pads
- 50 ft EL147HE cable to connect weigh pad to indicator
- Non-Legal for Trade

Ramps

- (L x W): Two 5.25 x 32.00 in
- Steel or aluminum

Specifications

Construction:

Steel or aluminum

Accuracy:

±3%

End Loading Capacity:


133% full scale at 30,000 lb
100% full scale at 40,000 lb

Warranty:

One-year limited

Part Number/Price

Part #	Description	Dimensions (L x W x H)	Est. Weight	Price
Steel Construction - Painted Black				
112330	60,000 lb (30,000 lb each)	7 ft x 2.5 ft x 5.63 in	2,500 lb	Consult
111748	80,000 lb (40,000 lb each)	12 ft x 2.5 ft x 5.63 in	4,400 lb	Consult
112328	80,000 lb (40,000 lb each)	14 ft x 2.5 ft x 5.75 in	5,200 lb	Consult
Aluminum Construction - Glass Beaded				
112329	60,000 lb (30,000 lb each)	7 ft x 2.5 ft x 5.63 in	1,250 lb	Consult

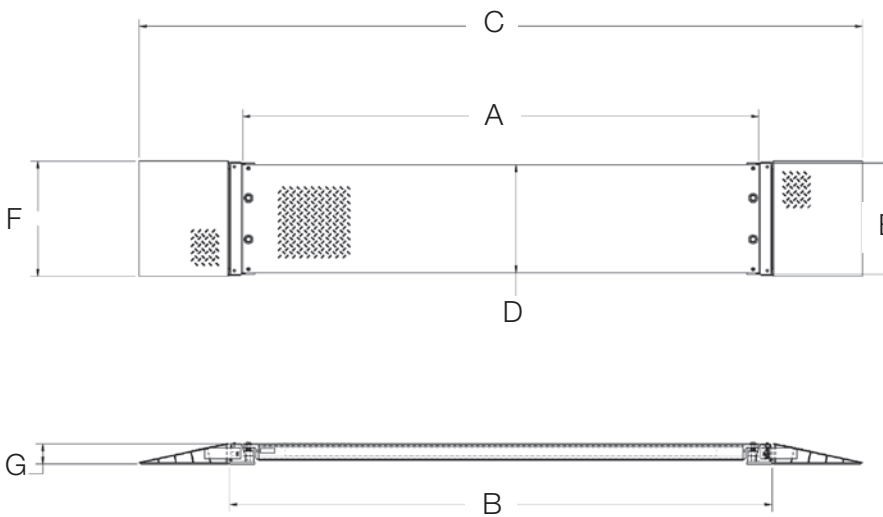

Dimensions

7 ft steel

A	83.60 in	E	31.00 in
B	90.90 in	F	32.00 in
C	141.25 in	G	5.63 in
D	30.00 in		

12 ft steel

A	143.60 in	E	31.00 in
B	150.90 in	F	32.00 in
C	201.2 in	G	5.63 in
D	30.00 in		

14 ft steel

A	167.60 in	E	31.00 in
B	174.90 in	F	32.00 in
C	225.25 in	G	5.75 in
D	30.00 in		

7 ft aluminum

A	83.60 in	E	31.00 in
B	90.90 in	F	32.00 in
C	141.25 in	G	5.63 in
D	30.00 in		

Note: 1 in = 25.4 mm

