




Picture is a representation of actual product

**Approvals**



**Interchangeable Products**

- RICE LAKE WEIGHING SYSTEMS  
**RL20001I** ..... page 95
- VPG® CELTRON  
**STC**.....page 188

**Weigh Module Available**


- RICE LAKE WEIGHING SYSTEMS  
**ITCM Isolated Tension  
Cell Mount**..... page 28

**Order Information**

Load Rating	Part #	Est. Weight	Price
25 lb	<b>61116</b>	2 lb	Consult
50 lb	<b>61117</b>	2 lb	Consult
100 lb	<b>61118</b>	2 lb	Consult
200 lb	<b>61119</b>	2 lb	Consult
250 lb	<b>61120</b>	2 lb	Consult
300 lb	<b>61121</b>	2 lb	Consult
500 lb	<b>61122</b>	2 lb	Consult
750 lb	<b>61123</b>	2 lb	Consult
1,000 lb	<b>61124</b>	2 lb	Consult
1,500 lb	<b>61125</b>	2 lb	Consult
2,000 lb	<b>61126</b>	2 lb	Consult
2,500 lb	<b>61127</b>	2 lb	Consult
3,000 lb	<b>61128</b>	2 lb	Consult
5,000 lb	<b>61129</b>	4 lb	Consult
10,000 lb	<b>61130</b>	5 lb	Consult
15,000 lb	<b>61131</b>	7 lb	Consult
20,000 lb	<b>61132</b>	18 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E
lb/in					
25 to 200	1/4-28 UNF	0.65	0.50	2.00	2.50
250 to 300	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 2,000	1/2-20 UNF	1.00	0.75	2.00	3.00
2,500 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.75
15,000	1-14 UNS	1.50	1.25	4.00	5.50
20,000	1 1/4-12 UNF	2.25	2.00	5.00	7.00

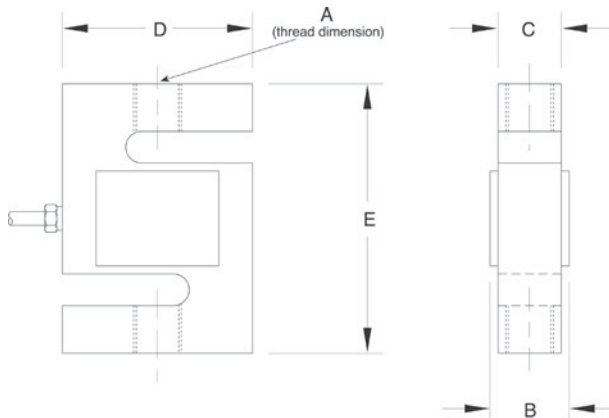

**Specifications**

- Full Scale Output:**  
3.0 mV/V
- Output Resistance:**  
349 to 355 ohm
- Input Resistance:**  
343 to 450 ohm
- Material/Finish:**  
High-alloy steel, nickel plated
- Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 V DC (15 V maximum)
- Combined Error:**  
0.03% full scale
- Insulation Resistance:**  
5,000 megohm
- Cable Length:**  
20 ft
- Cable Diameter:**  
0.200 in  
Polyurethane jacket
- Cable Color Code:**  
Red +Excitation  
Black -Excitation  
Green +Signal  
White -Signal
- Warranty:**  
One-year limited
- Approvals:**  
cFMus  
NTEP